


Estropos/Lingas com Mangas Metálicas Prensadas



A = 15 x Diâmetro do cabo

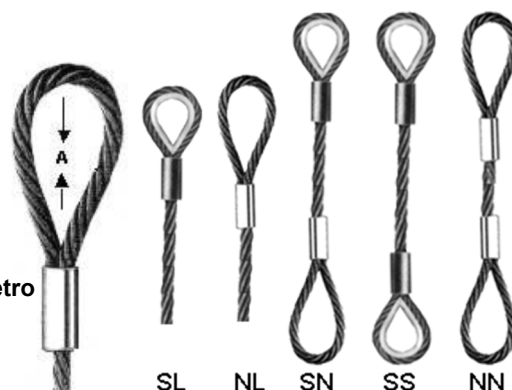

SL

NL

SN

SS

NN

Coefficiente de Segurança = 6:1

Diâmetro	Cargas de Trabalho Máximas de Utilização (C.M.U.) Kg				
					
	Simples	2 Pernadas		3 e 4 Pernadas	
mm	0°	0° < β < 45°	45° < β < 60°	0° < β < 45°	45° < β < 60°
6	340	470	340	700	490
8	590	820	590	1160	860
10	980	1350	980	2050	1430
12	1300	1800	1300	2700	1900
14	1800	2500	1800	3800	2650
16	2400	3300	2400	5000	3500
18	3100	4300	3100	6500	4500
20	3500	4900	3500	7400	5200
22	4300	6000	4300	9000	6400
24	4650	6500	4650	9800	6900
26	5500	7700	5500	12000	8200
28	6400	8900	6400	13500	9500
30	7500	10500	7500	15800	12000
32	8000	11200	8000	17000	11900
34	9200	12800	9200	19500	13600
36	10400	14500	10400	22000	15500
38	11750	16450	11750	24500	17500
40	12400	17000	12400	26000	18000

Cargas de trabalho segundo ISO 7531 / EN 13414-1 em cabos de aço de resistência 1770 N/mm² com alma de fibra, 6x19 e 6x37.